



PRODUCT DATASHEET

DYNACO X-40P OVERHEAD SECTIONAL DOOR

Copyright and Disclaimer Notice

Although the contents of this publication have been compiled with the greatest possible care, ASSA ABLOY cannot accept liability for any damage that might arise from errors or omissions in this publication. We also reserve the right to make appropriate technical modifications/replacements without prior notice.

No rights can be derived from the contents of this document.

Color guides: Color differences may occur due to different printing and publication methods.

Dynaco as word and logo are trademarks belonging to the ASSA ABLOY Group.

No part of this publication may be copied or published by means of scanning, printing, photocopying, microfilm or any other process whatsoever without prior permission in writing by ASSA ABLOY.

© ASSA ABLOY 2006-2026.

All rights reserved.

Overview

Not every industrial application calls for complexity. Sometimes the best solution is the one that simply works.

The Dynaco X-40P overhead sectional door is a reliable entrance door in our overhead sectional range, built to provide businesses that value clarity and core performance with essential functionality.

Available in a range of standard color choices and with impressive ratings for watertightness, wind load and air permeability — alongside excellent thermal performance — the Dynaco X-40P helps ensure stable conditions and smooth operations across demanding environments.

With a long lifetime expectancy, it is designed to perform reliably and keep operations running smoothly year after year.



Min size (W x H):	2150 x 2150 mm
Max size (w x H):	6000 x 6000 mm
Section height:	500 mm 610 mm
Top section height:	300 - 575 mm trimcut * 576 - 799 mm composed**
Panel thickness:	40 mm
Panel material:	Steel stucco insulated panels
Color outside:	Standard: 5 standard RAL colors Option: Any RAL color shop painted
Color inside:	RAL 9010 - pure white
Track types:	Standard, Low, High, Vertical
Windows:	Rectangular or oval acrylic windows 2+3mm
Passdoor:	Not available
Operation:	Pull down rope Servox operator Automated operation Access control Safety functions

* The door leaf height is achieved by trimcutting the topsection.




Dynaco X-40P Overhead sectional door



Insulation

Insulated section profiles

The door leaf has horizontal sections, connected together with hinges. The outer hinges of each section have rollers that run in the tracks. The horizontal sections are insulated panels designed without thermal bridges for optimal insulation. The panels are filled with water blown CFC-free polyurethane.

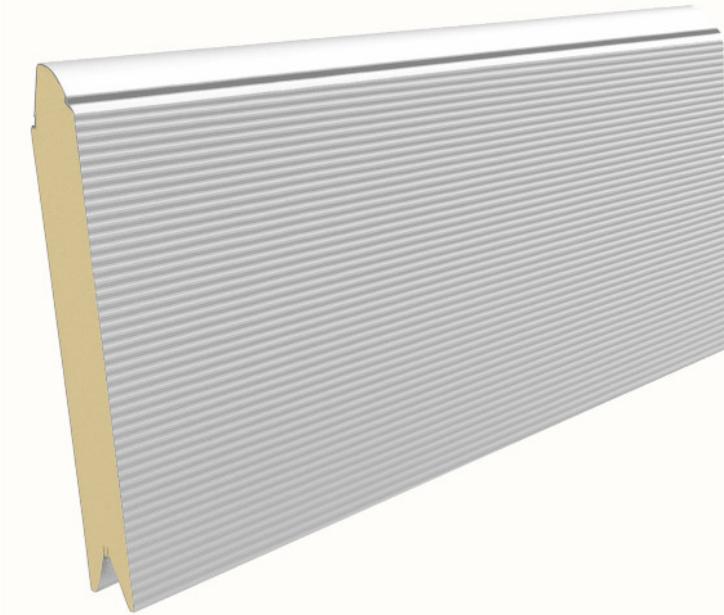

Top seal

Most energy loss is caused by a gap on the top of the door leaf (heat goes up). The top seal is the most influential seal on the door. The top seal is a double rubber flap on the door leaf, pressing against the lintel or wall.



Bottom seal

Installed on the bottom edge of the bottom panel. The flexible EPDM rubber material and the O-shape presses on the floor. It tolerates up to 15mm imperfections on the floor. The bottom seal also acts as the safety edge on electric doors, giving an air pulse if an object or person is below a closing door.



Side seal

Installed on the track set to close the gap between the tracks and the door leaf. The flexible rubber material.



Colors and materials

Standard colours

The RAL-colors are as close as possible to the official RAL HR collection. Max. deviation is 1,0 DE (RAL 7016 excluded).

- Outside color: The steel panel is available in the 6 standard RAL colors.
- Inside color: RAL 9010 - Pure white.

RAL9002



RAL9006



RAL7016



Optional colours

The door leaf can be factory painted in any RAL and NCS color plus some metallic colors, outside only. The painting can be applied to only the panel or to the complete door leaf, including frames and strips.

RAL9007



RAL9005



Windows

Windows allow light into the building to improve working conditions. It also allows people inside to see what is going on outside.



DARR: Double rectangular glazed, double sealed, provided with 3 and 2mm acrylic sheets, black window frame.

Light opening: 604 x 292mm



DAOR: Double oval glazed, double sealed, provided with 3 and 2mm acrylic sheets, black window frame.

Light opening: 604 x 292 mm




Optional ventilator in the bottom section.

Number of windows

Daylight width	Number of windows
2050 - 2134 mm	1
2135 - 2999 mm	2
3000 - 3864 mm	3
3865 - 4729 mm	4
4730 - 5594 mm	5
5595 - 6000 mm	6



Operating system

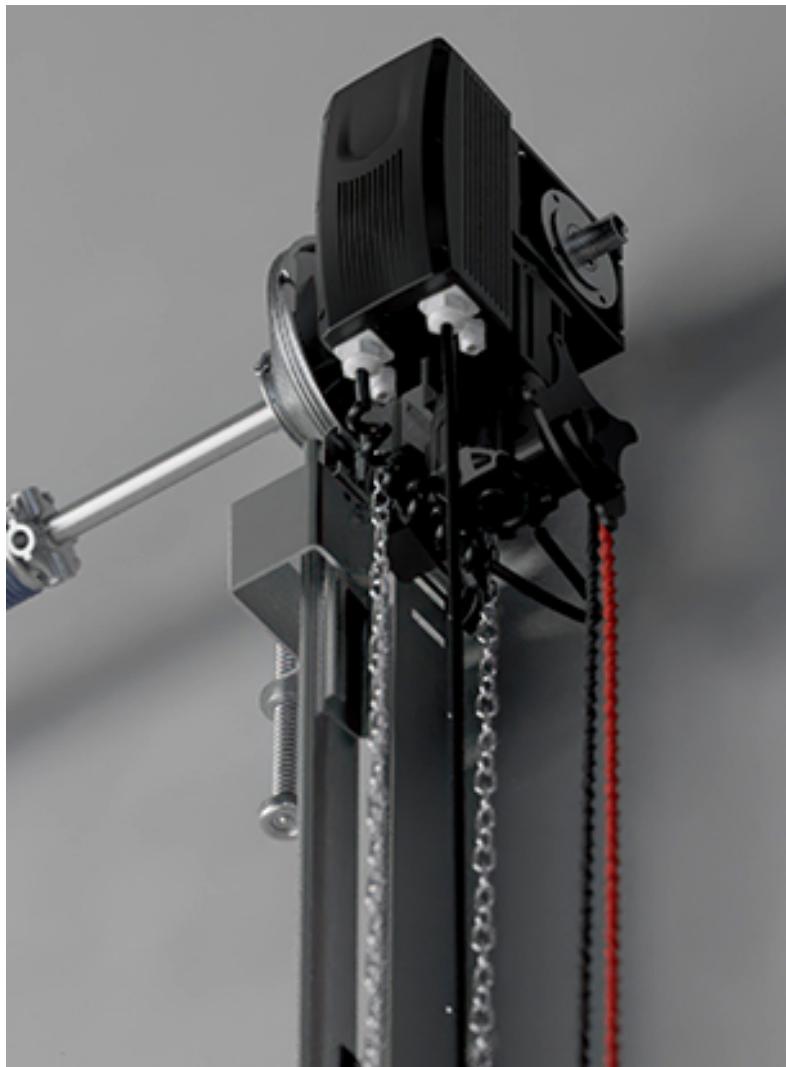
**Control unit****Motor**

The Dynaco X-40P overhead sectional door is supplied with an electrical operating system. The Servox operator and control unit make it possible to operate the door with automatic sensors such as radar, magnetic loop and photocells, but also remote control via external push buttons and hand held remote controls.

Key features:

- Smooth and silent
- Soft start and stop
- LCD plain-text display
- Over-torque protection
- Brushless technology
- Fits all track types and shafts
- Up to 0,2 m/s operating speed, depending on door type and setup
- IP54 protective rating
- Endurance 60 cycles per hour

Open/close automation

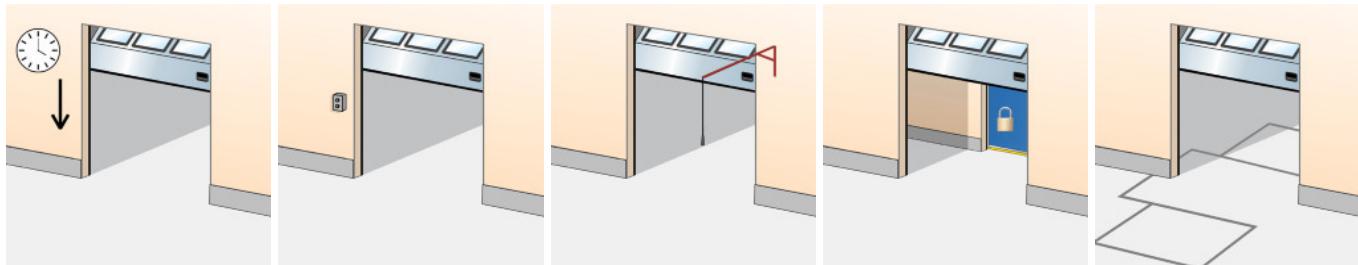

Automatic closing

A programmable timer closes the door after a specified time after fully open position and/or passing the photocell beam.

External control box

Installed close to the door if the main control unit needs to be installed away from public access.

Pull rope switch





A pull-rope switch above the door opening is handy for forklift trucks.

Interlocking

Developed for climate control or safety; If door A is open, door B cannot be opened.

Magnetic loop

A sensor in the floor detects a large object and opens the door. Ideal for frequent vehicle traffic.

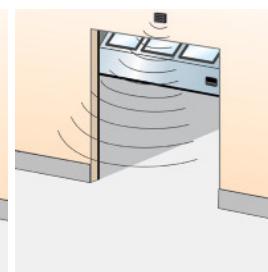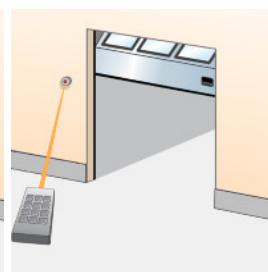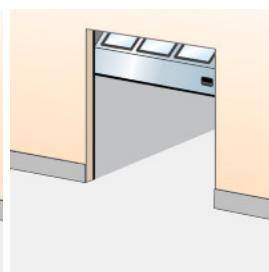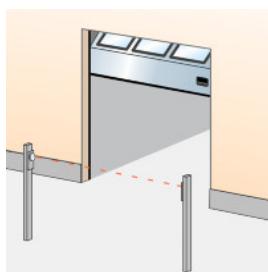

Opening photocells

A set of photocells on pillars, on each side of the door. When a person or vehicle passes the beam the door opens.

Reduced opening

When it is unnecessary or undesirable to fully open a door, reduced opening opens the door to a reduced height.





Remote control

A hand-held radio transmitter allows door operation from a vehicle or any position within 50-100 meters from the receiver and aerial at the door.

Radar

An infrared sensor above the door detects an object (person, vehicle). Ideal solution for frequent vehicle or personal traffic.

Safety automation

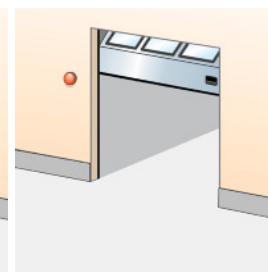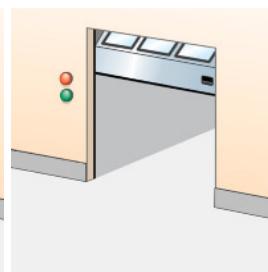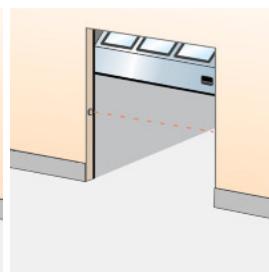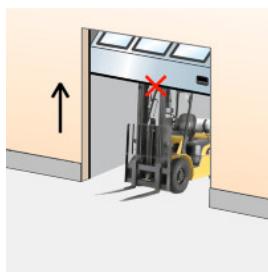

Safety edge

Standard on doors that have impulse or automated closing. A pneumatic sensor in the bottom seal detects any obstruction under a closing door and reverses the door.

Safety photocells

A photocell in the door opening. If the photocell beam is interrupted during closing, the door stops and reverses to the fully open position.

Traffic lights

Red and green lights on each side of the door. Detection of a vehicle gives a green light on that side and a red light on the opposite. Typical for parking garages.

Warning lights red or green

Flashing red light before or during door movement. Or continuous red light before and during door movement. Or green light to indicate an open door.

Manual operation

Integrated chain hoist

To open or close the door in case of power outage, an integrated chain hoist can be activated to operate by chain.



Locks

Lockbolt



Cylinder lock



Performance

CEN Performance



Windload resistance
Class 3
700 Pa (N/m²)
Measured at door size 4000 mm *
3000 mm



Air permeability
Class 3
6 m³/m²/h
Measured at 50 Pa pressure



Durability
100000 door cycles, if
service/replacement program is
performed



Acoustic insulation
R - 25dB



Thermal transmittance
0,87W/(m²·K)
Measured at door size 4000 mm *
3000 mm without windows



Operating forces and safe
openings
Passed
Maximum force allowed 400 N for
max 0,75 seconds.
Measured at freefall from 50 and
300 mm height




Water resistance
Class 3
> 50 Pa (N/m²)
Measured at door size 4000 mm *
3000 mm without windows

Operating performance

Model	SV120-ISD	SV140-ISD
Rated Voltage/Frequency	220-240V 50Hz	220-240V 50Hz
Motor power in KW	0.75	1.0
Fuse	10 A	10 A
Max output current on 24V	600 mA (auto fuse)	600 mA (auto fuse)
Rated output torque in Nm	100	120
Max output torque in Nm	120	140
Speed in RPM	5-50	5-50
Holding torque	700 Nm	700 Nm
Max cycles per hour	60c/h	60c/h
Max door area in m ²	49	60
Diameter hollow shaft in mm	1" / 25.44 mm (max 5000 * 4200 mm max 300kg door weight)	
Emergency release	Chainhoist	
Limit setting of door travel	Absolute encoder	
Optional accessories	Main power switch, Extended function board, Remote control	


Tracks and space requirements

Low ceilings

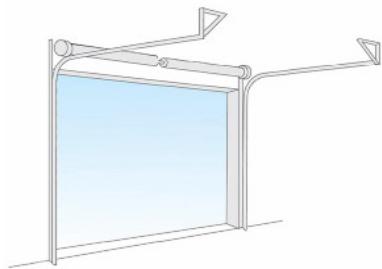

Standard lift


Most common, springs just above door opening.

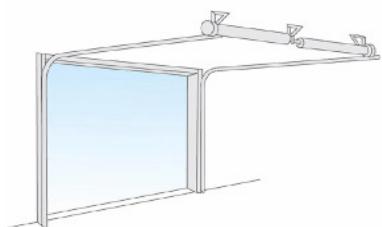

Low lift


For low ceilings, springs at end of horizontal tracks.

High ceilings

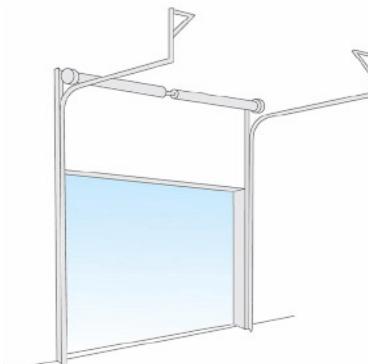

HL - High lift

If vertical lift is not possible, the HL still offers great space to pass vehicles.

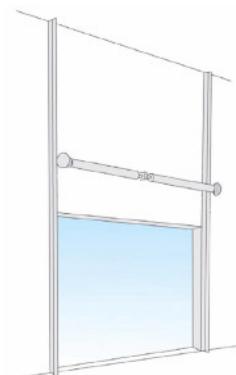


VL - Vertical lift

The door opens fully vertically, no need for horizontal tracks, to keep headroom clear. Typical in warehouses.

The grey marked area in the illustrations shows the free space required by door movement. Extra space requirements for electrically operated doors are stated in the operator specifications.

DLW	=	Daylight Width	The width of the clear opening
D	=	Depth	The space between the inner side of the wall and the end of the horizontal track construction
H	=	Excess height	The extra space required above the daylight height.
SL	=	Side space Left	The space required for tracks beside the daylight width.
SR	=	Side space Right	The space required for tracks beside the daylight width.

SL - Standard lift

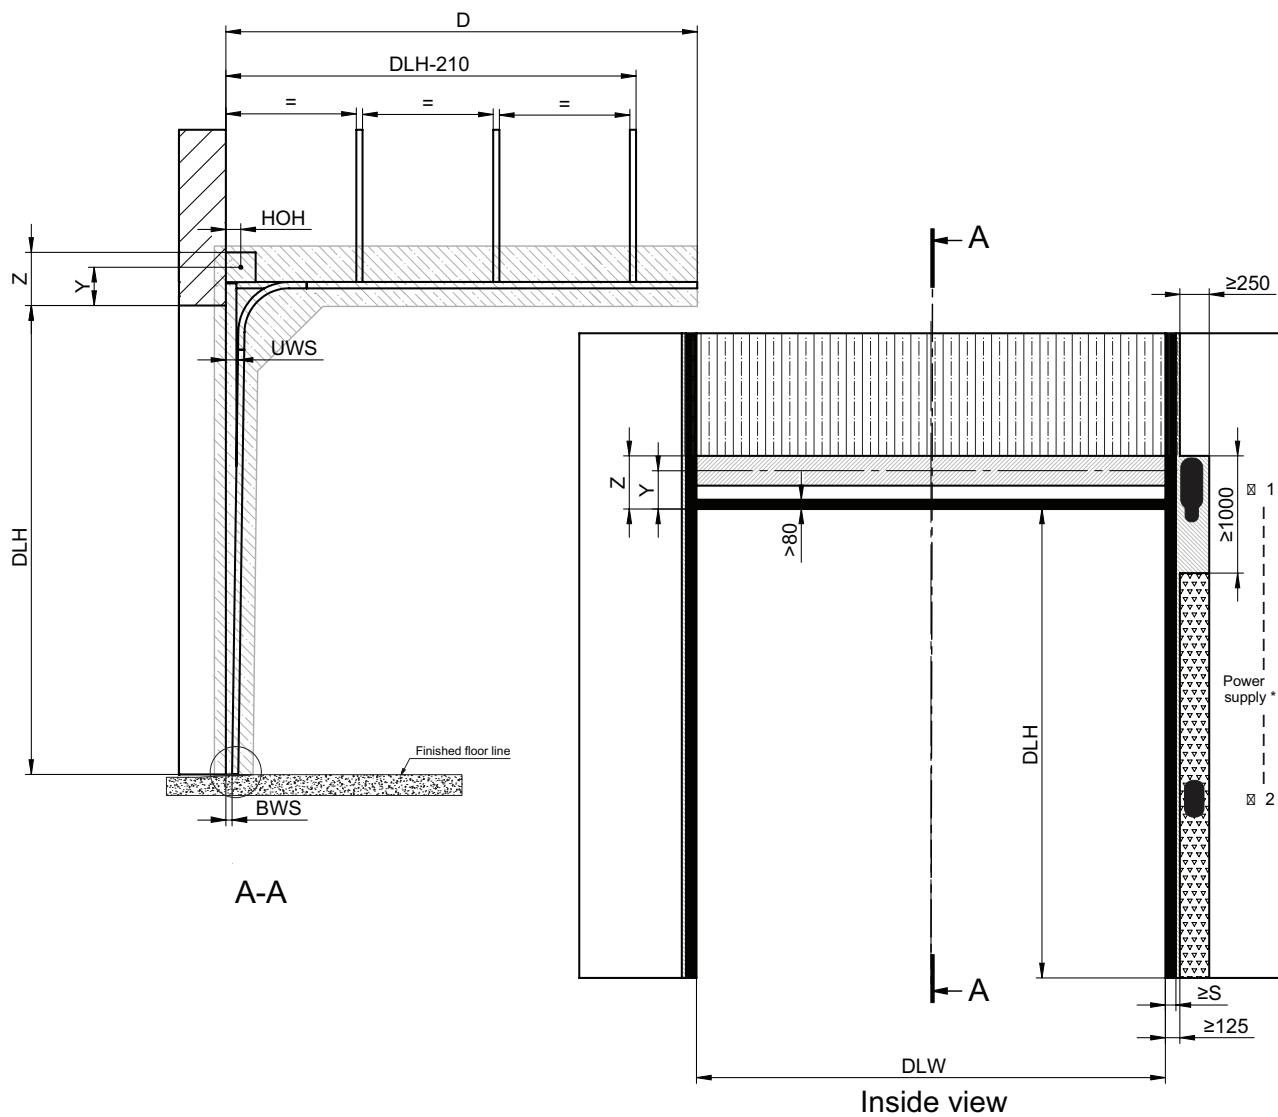


h 436 mm ($DLH \leq 5580$ mm)
 518 mm ($DLH > 5580$ mm)

SL/SR 465 mm Operator side
 165 mm Non-operator side

D $DLH + 475$ mm

For details see the specific building preparation drawings

HL - High lift

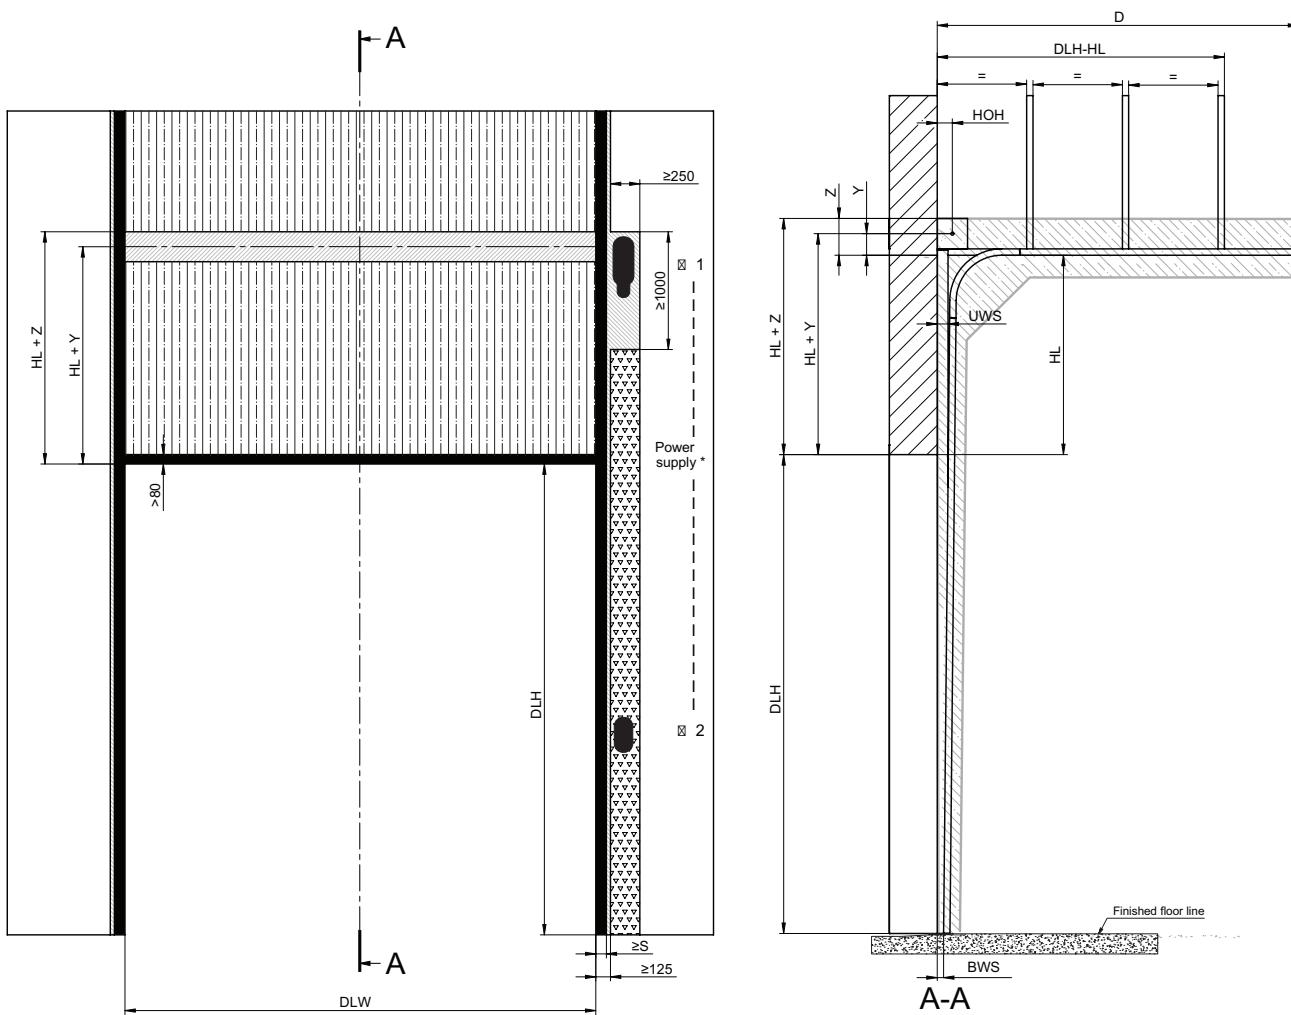

Inside view


h $HL + 308 \text{ mm (DLH} \leq 3010 \text{ mm)}$
 $HL + 358 \text{ mm (DLH} > 3010 \text{ mm)}$

SL/SR 465 mm Operator side
 165 mm Non-operator side

D $DLH - HL + 685 \text{ mm}$

For details see the specific building preparation drawings

LL - Low lift

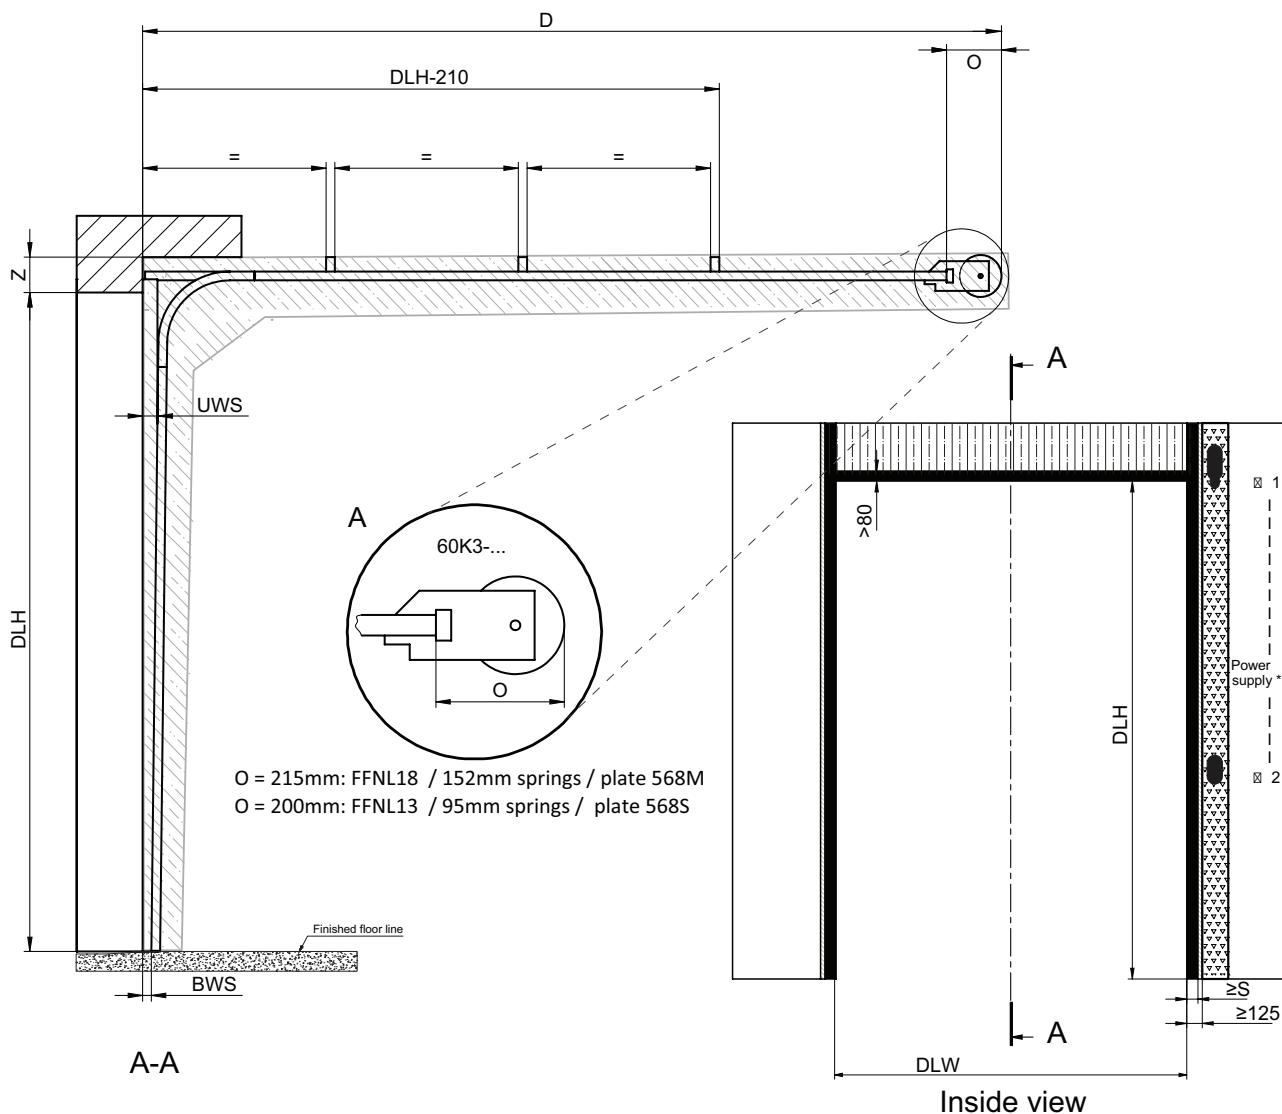


h 200 mm (DLH \leq 4002 mm)
215 mm (DLH \leq 5580 mm)

SL/SR 391 mm Operator side
165 mm Non-operator side

D DLH + 925 mm

For details see the specific building preparation drawings

VL - Vertical lift

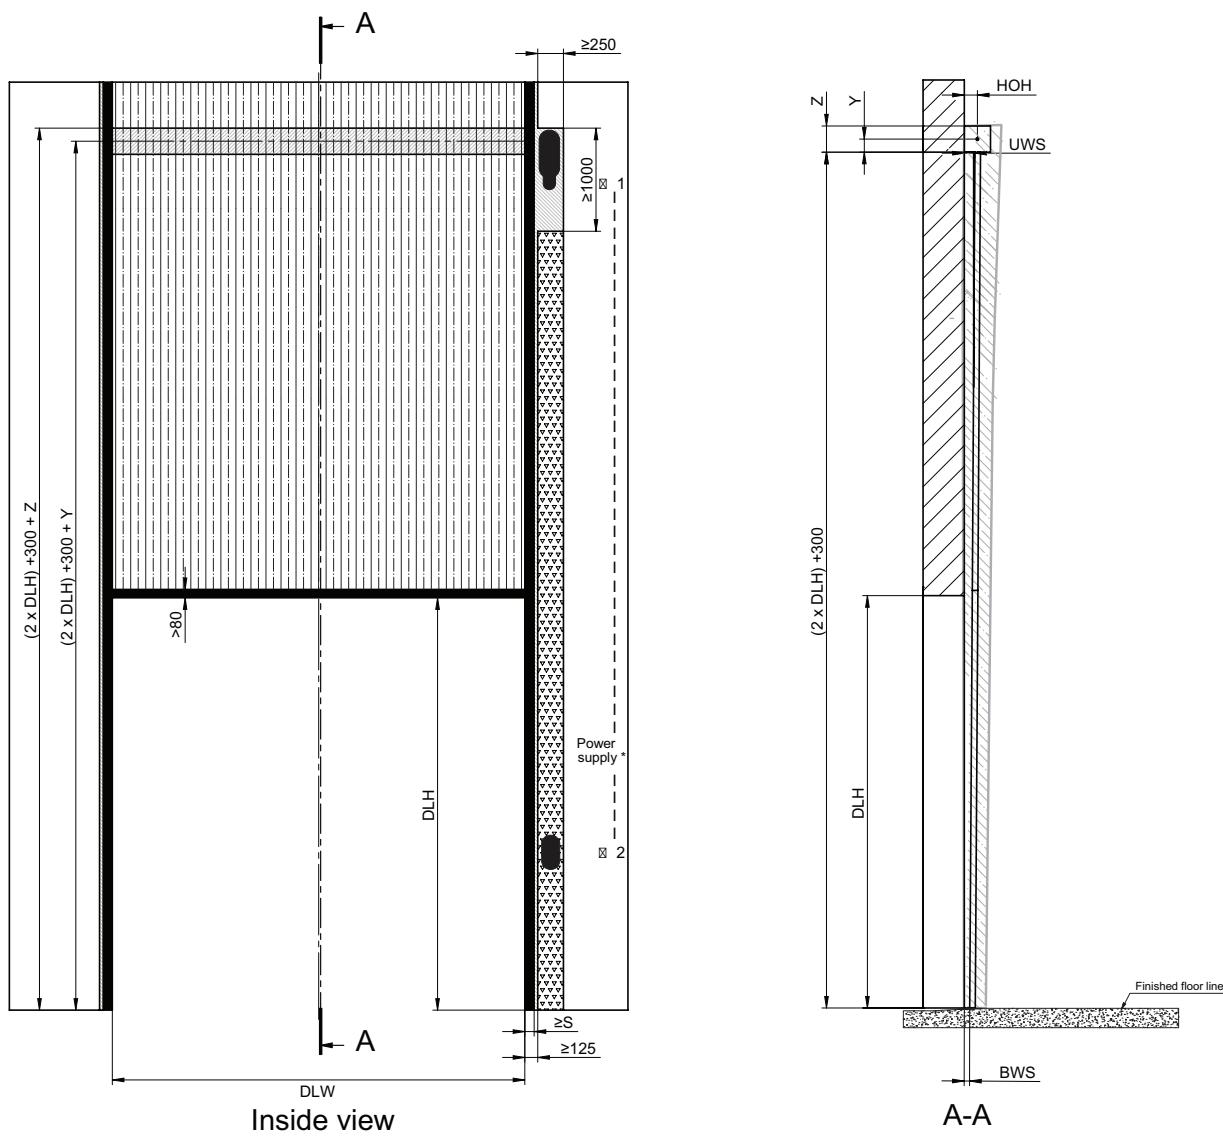

h	HL + 254 mm (DLH \leq 3300 mm) HL + 304 mm (DLH 3301 - 6000 mm) HL + 500 mm (DLH 6001 - 7000 mm) HL + 400 mm (if beam installed)
----------	---

SL/SR	445 mm Operator side 145 mm Non-operator side
--------------	--

D	500 mm (no beam) 525 mm (if beam installed)
----------	--

For details see the specific building preparation drawings



DYNACO EUROPE NV
Waverstraat 21
B-9310 Moorsel-Aalst (Belgium)
Tel. +32 53 72 98 98
Fax. +32 53 72 98 50
info@dynacodoor.com
www.dynacodoor.com

2026-01

About Dynaco

Dynaco is the world leader in high-speed door technology. It offers state of the art solutions for both commercial and industrial applications.

Founded in 1987, Dynaco has acquired an extensive expertise in high performance doors. Yet it continues to invest in order to exceed your expectations of quality and performance. A network of certified and dedicated partners ensures an optimal service to customers all over Europe.

Worldwide, we rely on our license partners in Russia, Japan, Vietnam and Brazil.

Dynaco is part of the ASSA ABLOY Group, the world leader in access solutions. Every day, we help billions of people experience a more open world.